

# NOVA *plus*

# PORTABLE EMISSIONS ANALYZER

for industrial combustion / emissions tuning,  
compliance reporting or trouble-shooting



Flow

Pres-  
sure

Draft

$\Delta P$

$\Delta^{\circ}F$

$^{\circ}F$

C<sub>3</sub>H<sub>8</sub>

CH<sub>4</sub>

H<sub>2</sub>S

SO<sub>2</sub>

NO<sub>x</sub>

NO<sub>2</sub>

NO

CO<sub>2</sub>

CO

O<sub>2</sub>



since 1984

**AIR** fair

EMISSION MONITORING SYSTEMS

- Simultaneous measurement of up to 8 gases
- Automatic calculations and data logging
- Easy operation via intuitive Remote Control Unit
- Rugged design for extreme field conditions
- Accuracy and reliability on numerous applications

Find Quality Products Online at:

[www.GlobalTestSupply.com](http://www.GlobalTestSupply.com)

[sales@GlobalTestSupply.com](mailto:sales@GlobalTestSupply.com)

# Built to do more...



## BASE Unit:

Measuring O<sub>2</sub>, CO, CO<sub>2</sub>, NO, NO<sub>2</sub>, SO<sub>2</sub>, CO-high, & CO-very high,  
Stack temperatures up to 2000°F  
Draft pressure to ±40"

- Emission calculations of mass flow, calculated or True NO(x), plus O<sub>2</sub> referencing to user defined values
- Combustion calculations of CO<sub>2</sub>, CO/CO<sub>2</sub> ratio, Excess air, Air ratio, Dewpoint, Efficiency & Heat losses
- Large condensate separator with PTFE coated filter
- High energy Li-Ion battery provides up to 20 hours operation time
- Built-in speed printer with easy paper loading for quick on-site documentation
- Compact and rugged transport case

## Options:

- Gas conditioning via high efficiency Peltier gas cooler
- CO protection with fresh air pump and cut off valve
- Internal sample flow monitoring
- Auto zeroing

## Remote Control Units (RCU)

### BASIC RCU:

- Bluetooth communication with base unit
- Large color graphic, backlit display with zoom function
- Simple, intuitive operation customizable screen settings
- Durable and dirt resistant keypad
- 16,000 measurement internal data storage
- High energy Li-Ion battery provides up to 30 hours operation time
- Wireless battery charging via Base Unit cradle
- USB interface
- SD card reader for additional memory and easy data handling
- Optional - Wireless PC interface via Bluetooth

### Additional features of the COMFORT RCU:


- Integrated Manometer for differential pressure and flow
- Differential Temperature inputs
- Auxiliary (AUX) input for optional HC or humidity probe

## Software Options:

- MRU Online View Software for real-time monitoring and reporting
- MRU 4 U Application for iOS and Android SMART devices

# Customized for your needs

## PROBES AND PROBE TUBES

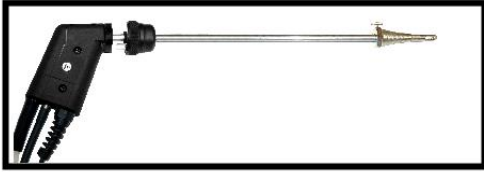

Industrial probe for interchangeable probe tubes with 9' or 16' rugged, braided sheathed sampling line and Viton hose for combustion and emission measurements



probe tubes (4" to 80" long) in SS (1,200°F) or Inconel (2,000°F) Also available with sintered metal filter



Industrial probe for interchangeable probe tubes with 9' sampling line and heated probe handle and easy replaceable quartz glass wool filter for industrial combustion analysis



High temp ceramic probe (3,000°F) Without temperature measurement




L-Type SS with or without K-Type t/c in sizes from 4" (0.12Ø) to 79" (0.47 Ø)

## PITOT TUBES



S-Type SS with K-Type t/c (59" lead) and 1.1"Ø protection tube available in 19" or 39" lengths (0.31"Ø)



Exchangeable probe tubes for 1,200°F to 2,000°F




Sintered metal filter




HC leak detection probe (requires AUX output option)



Rugged, aluminum framed transport case



Additional storage | Mounted under transport case

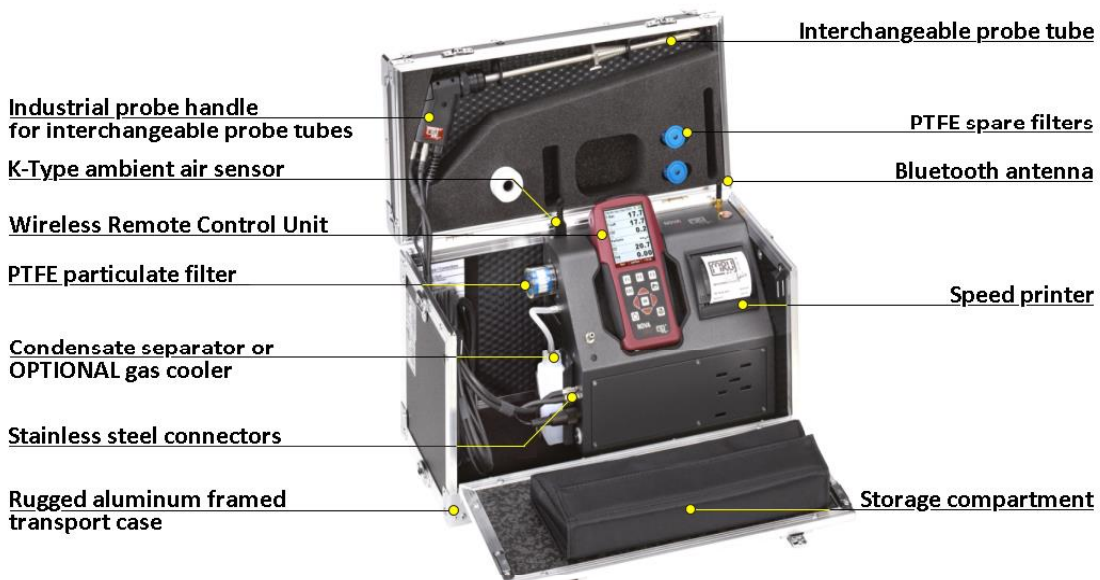

Industrial probe handle for interchangeable probe tubes

K-Type ambient air sensor

Wireless Remote Control Unit

PTFE particulate filter

Condensate separator or OPTIONAL gas cooler

Stainless steel connectors

Rugged aluminum framed transport case

Interchangeable probe tube

PTFE spare filters

Bluetooth antenna

Speed printer

Storage compartment

## TECHNICAL SPECIFICATIONS

<b>NOVAplus analyzer</b>	Portable analyzer with up to 5 electrochemical sensors and 3 gas NDIR bench
<b>Fuel types</b>	Natural gas, propane, butane, #2, #5, & #6 light oils, heavy oil, kerosene, distillate #1, diesel, coal, coal anthracite & bituminous, wood (dry, 10%, 20%, 30%, &40% M.), pellets, and four user defined fuel types

Measurement components	Measuring range	Accuracy
O <sub>2</sub> Oxygen	0 ... 21.0 Vol-%	± 0.2 Vol-% abs.
CO Carbon monoxide (H <sub>2</sub> compensated)	0 ... 4,000 ppm overload 10,000ppm *	± 10 ppm or 5 % reading < 4,000 ppm / 10 % reading > 4,000 ppm
CO Carbon monoxide low	0 ... 500 ppm with 0.1 ppm resolution **	± 2.0 ppm or** 5 % reading
CO Carbon monoxide high	0 ... 4,000 ppm overload 20,000ppm *	± 20 ppm or 5 % reading < 4,000 ppm / 10 % reading > 4,000 ppm
CO Carbon monoxide very high	0 ... 40,000 ppm overload 100,000ppm *	± 0.02% or 5 % reading < 0.4% / 10 % reading > 0.4%
NO Nitric oxide	0 ... 1.000 ppm overload 5,000ppm *	± 5 ppm or 5 % reading < 1,000 ppm / 10 % reading > 1,000 ppm
NO Nitric oxide low	0 ... 300 ppm with 0.1 ppm resolution **	± 2.0 ppm or** 5 % reading
NO <sub>2</sub> Nitrogen dioxide	0 ... 200 ppm overload 1,000ppm *	± 5 ppm or 5 % reading < 200 ppm / 10 % reading > 200 ppm
NO <sub>2</sub> Nitrogen dioxide low	0 ... 100 ppm with 0.1 ppm resolution **	± 2.0 ppm or** 5 % reading
SO <sub>2</sub> Sulfur dioxide	0 ... 2,000 ppm overload 5,000ppm *	± 10 ppm or 5 % reading < 2,000 ppm / 10 % reading > 2,000 ppm
H <sub>2</sub> S Hydrogen sulfide	0 ... 200 ppm overload 2,000ppm *	± 5 ppm or 5 % reading up to 500 ppm 10 % reading up to 2,000 ppm
CO <sub>2</sub> Carbon dioxide single NDIR	0.....40%	± 0.3 Vol-% abs. or 5% reading
CO CO Carbon monoxide	3 Gas NDIR 0.....10,000ppm up to 10%	± 0.03% or ±3% of reading
CO <sub>2</sub> Carbon dioxide	3 Gas NDIR 0.....3% up to 30%	± 0.5% or ±3% of reading
CxHy Hydrocarbons as CH <sub>4</sub> or	3 Gas NDIR 0.....10,000ppm up to 3%	± 0.03% or ±3% of reading
CxHy Hydrocarbons as C <sub>3</sub> H <sub>8</sub>	3 Gas NDIR 0.....2,000ppm up to 5,000ppm	± 30 ppm or ±3% of reading

\*overload range recommend only for short time measurements

\*\*are not separate sensors; selected sensors are used with special calibration

Stack / Flue gas temperature	0 ... 1,200°F / 2,012°F (with stainless steel / Inconel steel tube)	± 4°F ... < 392°F / 1 % reading > 392°F
Primary-air / Ambient temperature	0 ... 212°F	± 2°F
Differential temperature	up to 2,012°F (with suitable material of sampling tube)	± 4°F ... < 392°F / 1 % reading > 392°F
Stack / Differential pressure	+/- 40 inH <sub>2</sub> O (100hPa)	± 0.01 inH <sub>2</sub> O or 1% reading
Gas flow velocity measurement	1 ... 40 m/s (using Pitot tube)	

### Calculated values (fuel type dependent)

Carbon dioxide	0 ... CO <sub>2</sub> max.	Air Ratio (Lambda)	1 ... 9.99
Heat losses qA	0 ... 99.9 %	Excess Air	0 ... 99.9
Efficiency	0 ... 100 % / 120 %	CO/CO <sub>2</sub> ratio	0 ... 10

### General specifications

Operation temperature	41°F .... 113°F, max. 95 % RH, none condensing
Storage temperature	-4°F ..... 122°F
Ambient conditions	not in aggressive, corrosive or high dust environments, not for use in hazardous areas
Power supply - Base Unit	Lithium-Ion battery, 20 h operation, (with gas cooler 10 h)
- RCU	Lithium-Ion battery, 30 h operation
Grid power supply	100 - 240 Vac / 50 ... 60 Hz / 5A
Protection class	IP20
Weight	Complete unit approx. 16.3lbs / RCU 0.88lbs
Dimensions	Complete unit 18.5" x 9" x 12" (W x H x D) RCU 7.36" x 3.54" x 1.5"

Data subject to change without notice

