

AcuSplitCT Series 400/600/1000/1500/2000/3000/5000A Split Core Current Transformer

The Accuenergy split core CTs are compact and low-cost current transformers with high accuracy. The Split Core CTs are ideal for quick and easy installation without disconnecting cables during installation. The internal precision burden resistor across the secondary winding of the CT provides a safe low voltage output and permits safe opening of the secondary.

FEATURES


- Clamp-on design, easy installations
- 333mV output, safe installations
- Most cost-effective

SPECIFICATIONS

Rated Primary Current	400A, 600A, 1000A, 1500A, 2000A, 3000A, 5000A
Rated Secondary Current	333mV
Linearity Accuracy	0.5% (at 10%-130%)
Lead	8'(2.5m), twisted pair, White-Positive, Brown-Negative Bare-Shield, 22AWG
Window Size	3 inch by 5 inch
Insulation Voltage	600Vac, Category III
Frequency range	50/60Hz
Withstand Voltage	3,000Vac
Standard	IEC 60044-1
Certification	UL, CE approved & RoHS compliant
Construction	Epoxy encapsulated housing

ORDERING INFORMATION

Ordering Number:	AcuCT- 3050	-	Rated Input	:	333
Ordering Example:	AcuCT- 3050	-	1000	:	333
			400: 400A		
			600: 600A		
			1000: 1000A		
			1500: 1500A		
			2000: 2000A		
			3000: 3000A		
			5000: 5000A		

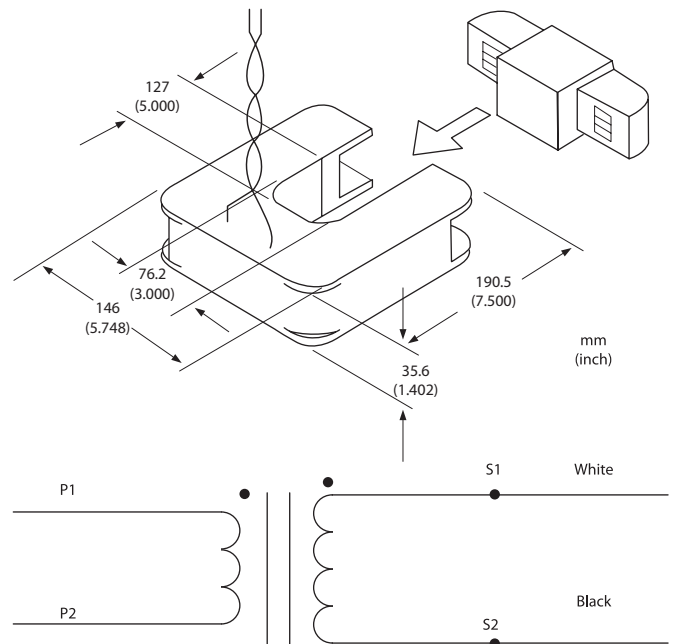

ACCUEVERGY

Your Power and Automation Partner